

INSTALLATION MANUAL

Econo Plus Spiral Stair



Illustrations are general and may not match your specific stair design.

CALIFORNIA PROPOSITION 65 RAW WOOD PRODUCT EXPOSURE



WARNING: Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. For more information go to www.P65Warnings.ca.gov/wood

CALIFORNIA PROPOSITION 65



WARNING: This product can expose you to chemicals including formaldehyde, ethylbenzene, titanium dioxide, cumene, carbon black, silica and wood dust, which are known to the State of California to cause cancer, and toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

IMPORTANT MESSAGE

On behalf of everyone at Salter Spiral Stair, we would like to thank you for your purchase of one of our products. This product is designed and manufactured in the USA. This stair comes with an Installation Manual. It is important that you read and fully understand this manual prior to installation. Following the steps exactly as specified in the manual will ease installation and reduce the amount of time necessary to complete the process. Keep this manual even after the installation process has been completed. Understand how to use tools that may be required during the installation process. Observe all safety warnings called out in this manual. Make sure those who may install this product for you understand this manual as well as you do.






Salter Spiral Stair
105 GP Clement Drive
Collegeville, PA 19426

Table of Contents

Preparing for Installation	4	Checking the Handrail Curvature	16
Parts & Hardware	5-6	Pulling the Handrail into a Spiral	17
Center Column Assembly	7	Aluminum Handrail Installation	18
Platform and Base Installation	8-10	Center Baluster Installation	19-20
Tread and Baluster Installation ...	11-12	Platform Rail Installation	21
Bottom Baluster Installation	13		
Aluminum Handrail Forming.	14-15		

NOTICE !!!

Unauthorized modifications may present extreme safety hazards and could also result in injury or product damage. Salter Spiral Stair strongly warns against, rejects and disclaims any modifications, add-on accessories or product alterations that are not designed, developed, tested and approved by Salter Spiral Stair's Engineering Department. Any Salter Spiral Stair product that is altered, modified or changed in any manner not specifically authorized after original manufacture – including the addition of “aftermarket” accessories or component parts not specifically approved by Salter Spiral Stair – will result in the Salter Spiral Stair warranty being voided. Any and all liability for personal injury and/or property damage caused by any unauthorized modifications, add-on accessories or products not approved by Salter Spiral Stair will be considered the responsibility of the individual(s) or company designing and/or making such changes. Salter Spiral Stair will vigorously pursue full indemnification and costs from any party responsible for such unauthorized post-manufacture modifications and/or accessories should personal injury and/or property damage result.

 <p>This symbol means: ATTENTION! BECOME ALERT!</p> <p>Your safety and the safety of others is involved. Signal word definitions: The signal words below are used to identify levels of hazard seriousness. For your safety and the safety of others, read and follow the information given with these signal words and/or the symbol shown above.</p>	 WARNING WARNING indicates a potentially hazardous situation which, if not avoided, COULD result in death or serious injury.
	 CAUTION CAUTION indicates a potentially hazardous situation which, if not avoided, MAY result in minor or moderate injury. It may also be used to alert against unsafe practices or property damage.
 DANGER DANGER indicates an imminently hazardous situation which, if not avoided, WILL result in death or serious injury.	 CAUTION CAUTION used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, MAY result in property damage

Preparing For Installation

Read the Installation Manual

- If anyone involved in the installation process cannot read English, it is the owner's responsibility to explain the contents of this manual to them.
- If any portion of this manual is unclear, contact the Salter Spiral Stair Customer Service Department for clarification.
- It is the owner's responsibility to be familiar with the use of any tools that may be necessary to complete the installation of this product. Read the manual for these specific tools.
- Do not install or allow anyone to install this product if there are any questions about the installation process.
- Never attempt to install this product if any of the components are damaged or have any unauthorized modifications.
- All persons should be trained. The owner is responsible for training the users.
- Wear the appropriate personal protective equipment during installation.
- Wear hearing protection.
- Wear safety glasses.
- Wear a dust mask to avoid breathing dust.
- Never allow children, unskilled or improperly trained people to participate in the installation process.
- Keep the Installation Manual legible and intact.
- Do not attempt to install this product while under the influence of drugs or alcohol.
- The owner/user can prevent and is responsible for accidents or injuries occurring to themselves, other people or property.

Site Preparation

- Check the area where the product is to be installed.
- Be sure the area is clear of pets and people, especially young children. Stop the installation process if any enter the area.
- Installation should be done in daylight or in good artificial light.
- Only use components approved by the manufacturer.



















Installation Preparation














- Do not tamper with any component.
- Use extra care when unloading or moving any component. Some components may be heavy and require multiple people to move them safely.
- Keep all fasteners such as nuts and bolts well secured.
- Verify that all components are in good condition and are not damaged in any way.
- Do not start the assembly process until you read the Installation Manual.
- Do not use the stair until the assembly process is complete.

Suspending the Installation Procession

- If it is necessary to suspend the installation process, it is the owner's responsibility to mark off the area to limit access until the installation is complete.
- Do not allow anyone to use the stair until the assembly process is complete.

Parts & Hardware

			 (for 60" diameter stair only)	
① Base Plate	② Bottom Baluster	③ Main Balusters	④ Center Balusters	⑤ Single Threaded Column
				
⑥ Treaded Coupler	⑦ Dual Threaded Column	⑧ Tread (8.5" hub height)	⑨ Platform	⑩ Column Ext with Cap
				
⑪ Aluminum Handrail	⑫ Top Baluster Bracket	⑬ Aluminum HR End Cap	⑭ Bottom Baluster Bracket	⑮ Platform Rail
				
⑯ Extra Platform Rail (Optional)	⑰ Spacer	⑱ Bottom Tread (5.75" hub height)		


Item		Description	Item		Description
(A)		5/16"-18 x 5/16" Socket Set Screw	(U)		#12x1-1/2" Wood Screw
(B)		3/8" Flat Washer			
(C)		3/8"x3" Lag Screw			
(D)		1/4" Flat Washer			
(E)		1/4" Lock Washer			
(F)		1/4"-20 Hex Nut			
(G)		1/4"-20 x 1-1/2" Carriage Bolt			
(H)		1/4"-20 x 3/4" Carriage Bolt			
(I)		#10 x 3/4" SQ. Drive D&T			
(R)		#12-1" Baluster Screw			
(S)		1/4"-20x1" Tube Connector Screw			
(T)		Tube Connector			

Center Column Assembly

1. Starting with a single threaded column section (5), screw a threaded coupler (6) into the threaded end of the column section until approximately 1" of the connector remains exposed.
2. Screw a double threaded column section (7) onto the exposed half of the threaded coupler from step 1. Tighten until there are no gaps between the column pieces.
3. Screw another threaded coupler (6) into the threaded end of the assembly.

NOTE: Additional double threaded column sections (7) may be included depending on the height of the stair being installed. Repeat steps 2 and 3 to join the additional sections.

4. Screw the final single threaded column section (5) onto the assembly. Tighten all of the sections of threaded column and ensure that there are no gaps between the column sections.
5. Cut the length of the center column assembly to approximately 10" longer than the floor to floor dimension.

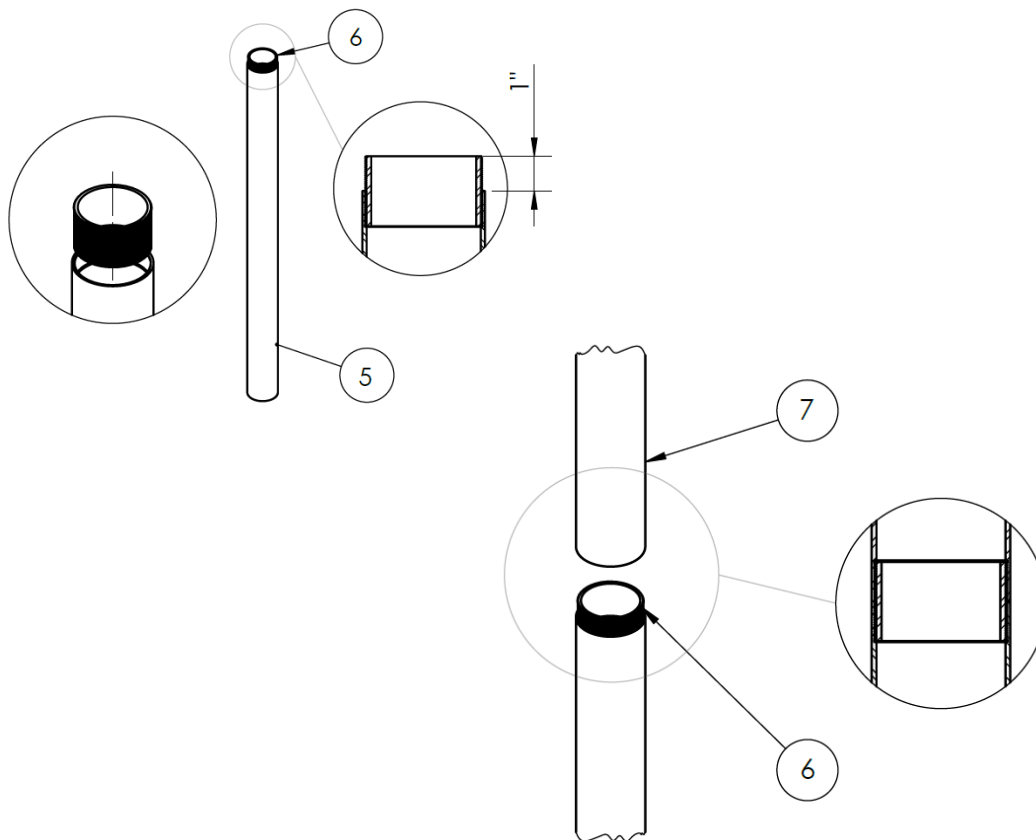

⚠ WARNING

The column sections must be fully tightened. Failure to tighten the sections of the column together could make the stair unstable and result in serious injury or death.

Hardware

Parts

⑤ ⑥ ⑦

Tools

Platform and Base Installation

1. While all treads and platform are on the ground, partially thread set screws (A) into each tread and platform sleeve.
2. Partially thread set screws (A) into the baseplate (1). Insert the center column assembly into the baseplate until is fully seated. Attach the baseplate (1) to the center column assembly with set screws (A).
3. Determine the number of 1/8" spacers per rise using the following simple calculations:

- a. Add number of treads and platforms = _____
 - b. Measure the floor to floor height in inches = _____
 - c. Divide 3b by 3a = _____ (This is your riser height)
- NOTE: Riser height is usually between 8 ½" and 9 ½".

4. The bottom tread has a hub that measures 5.75" in height. The remaining treads have a hub that measures 8.5" in height.
5. The total number of spacers needed can be determined below.
 - a. Floor to floor measurement from 3b in inches = _____
 - b. Count the # of treads (not including the bottom tread) = _____
 - c. Multiply 5b by 8.5 = _____
 - d. Add 16.25 to 5c = _____
 - e. Subtract 5d from 5a = _____
 - f. Divide 5e by .125 = _____
 - g. Stairs with Wood Tread Covers = Subtract 6 from 5f = _____. This is the total number of spacers needed for your stair.
 - h. For stairs without Wood Tread Covers - Place 6 of the spacers counted out in 5f onto the center column assembly.
6. The remaining spacers from 5g or 5f must be evenly distributed in between the treads of the stair.
 - a. Divide remaining number of spacers (5g or 5h) by 3a = _____
 - b. The whole number is the number of spacers for each rise. _____

EXAMPLE: If 5h is 48.5 and 3a = 12, the result is $48.5/12 = 4.0417$. The whole number would be 4.

- c. Multiply 3a by 6b = _____
- d. Subtract 6c from 5g/5h = _____

NOTE: This is the remaining number of spacers that must be added throughout the entire stair to meet the floor to floor height. Do not add all of the spacers calculated in 6d to only one rise. Add only one spacer per rise.

7. Place the number of spacers determined in 6b onto the center column assembly.
8. Place the bottom tread (18) onto the center column assembly. Measure the rise from the floor to the top surface of the tread. If your stair has wood tread covers, the measurement should be 0.75" shorter than the rise height

Hardware

(A) (B) (C)

Parts

(8) (9) (10)

(17)

Tools



you calculated in 3b. If you do not have wood tread covers, the measurement should be equal to the rise height calculated in 3b.

9. Place the number of spacers determined in 6b onto the center column assembly.
10. Place a tread (8) over the center column assembly.
11. Measure the rise from the top surface of the bottom tread to the top surface of the next tread. The measurement should be equal to the rise height calculated in 3b.
12. Repeat steps 9-11 for the remaining treads and platform.


NOTE: Remember to add in the extra spacers calculated in 6e during the assembly process. This will make sure the top of the platform is located correctly at the end of the assembly process. This additional spacer will cause the measurement to be 1/8" larger than the riser height when included. If you have wood tread and platform covers, the top surface of the platform will be 3/4" shorter than the loft surface.

NOTE: Depending on how the platform is being mounted in your application, 3/8" holes may need to be drilled through the platform edge as needed to install the mounting lag screws. If the platform is being mounted in a corner, make sure that both edges of the platform are secured to the wall.


⚠ WARNING

The platform is heavy. Steps 4 through 6 require a minimum of 3 people. One to keep the column steady and 2 people hoist and hold the platform in place. A fourth person may then drill and fasten the platform.

13. Use 3/8"x3" lag screws (C) and washers (B) to attach the platform to the mounting surface.

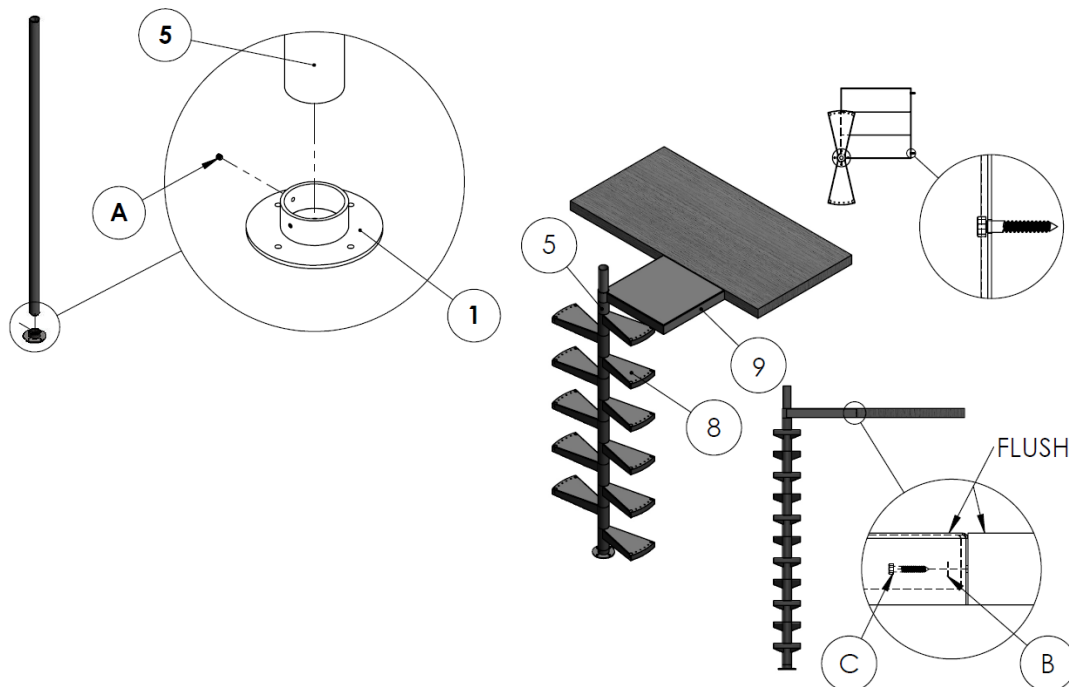


14. Plumb center column assembly and attach base plate to floor with 3/8"x3" lag bolts (C) and washers (B). Lead anchor shields (not supplied) will be needed if installing into concrete.

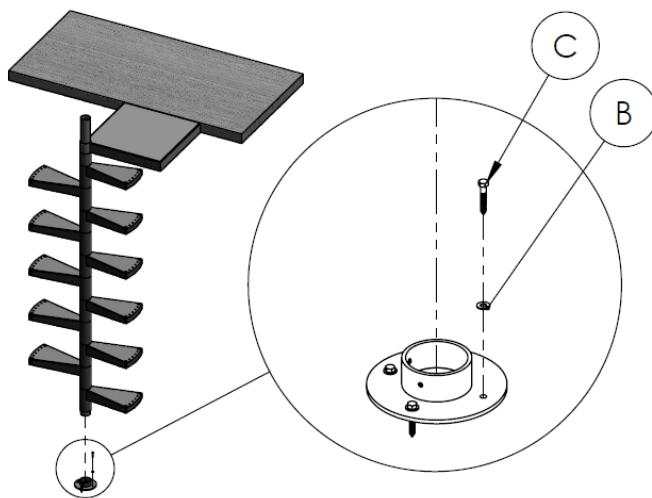

⚠ WARNING

The lag screws securing the base plate to the floor and the platform to the wall must be installed and fully tightened before continuing with the installation process. Failure to do so could cause the stair to be unstable and could result in serious injury or death.

15. Slide the column extension (10) down over the center column assembly and tighten set screws (A).
16. Place the column cap on the top of the column extension.

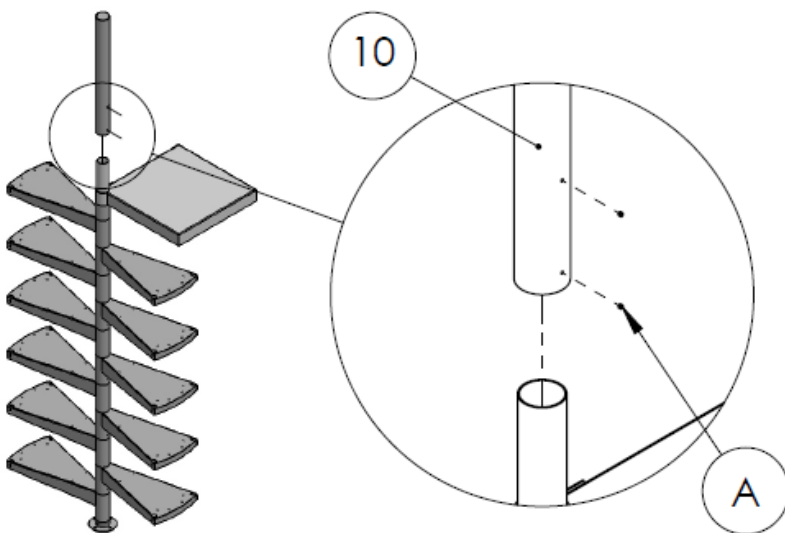

Hardware

(B) (C)

Parts


Tools





Tread and Baluster Installation

1. Start installation with the top tread. Place a main baluster (3) in the hole closest to the platform. Move the baluster up or down until the bottom of the baluster is flush with the bottom edge of the tread.
2. Attach this baluster to the tread using the carriage bolt (G), nut (F), washer (D) and lock washer (E).

NOTE: Main Balusters have two holes drilled near the bottom.

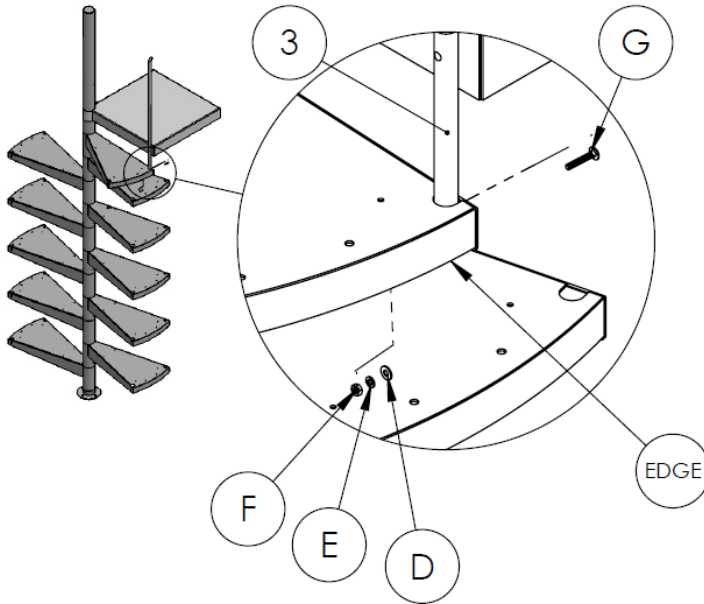

3. For stairs that are 60" in diameter, plumb the main baluster and attach to the face of the platform using the top baluster bracket, carriage bolts (H) and SQ Drive D&T screws (I), nut (F), washer (D), and lock washer (E). For stairs that are 42" in diameter, plumb the main baluster and attach to the face of the platform using carriage bolt (G), nut (F), washer (D) and lock washer (E). A 1/4" diameter hole must be drilled in the platform at the location of the pre-drilled hole in the baluster.
4. Check that the tread is level and the baluster is plumb. Tighten the 5/16" set screws in the tread hub to lock the top tread to the center column.

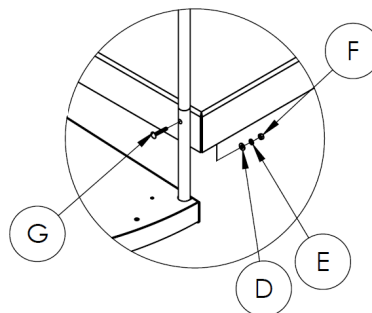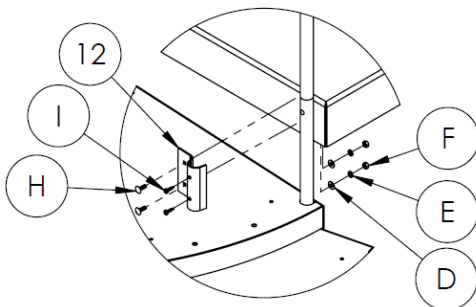

Hardware

(D) (E) (F) (G)

(H) (I)


Parts

(3)

Tools




5. Spin the next tread into position beneath the tread above. Place a main baluster through the upper tread and into the lower tread. Move up or down until the bottom of the baluster is flush with the bottom edge of the lower tread.
6. Secure the baluster to the lower tread using carriage bolt (G), nut (F), washer (D) and lock washer (E).
7. Fasten the baluster with carriage bolt (G), nut (F), washer (D) and lock washer (E).
8. Check that the tread is level and the baluster is plumb. Tighten the 5/16" set screws in the tread hub to lock the tread to the center column.
9. Repeat steps 6-9 with the remaining treads.

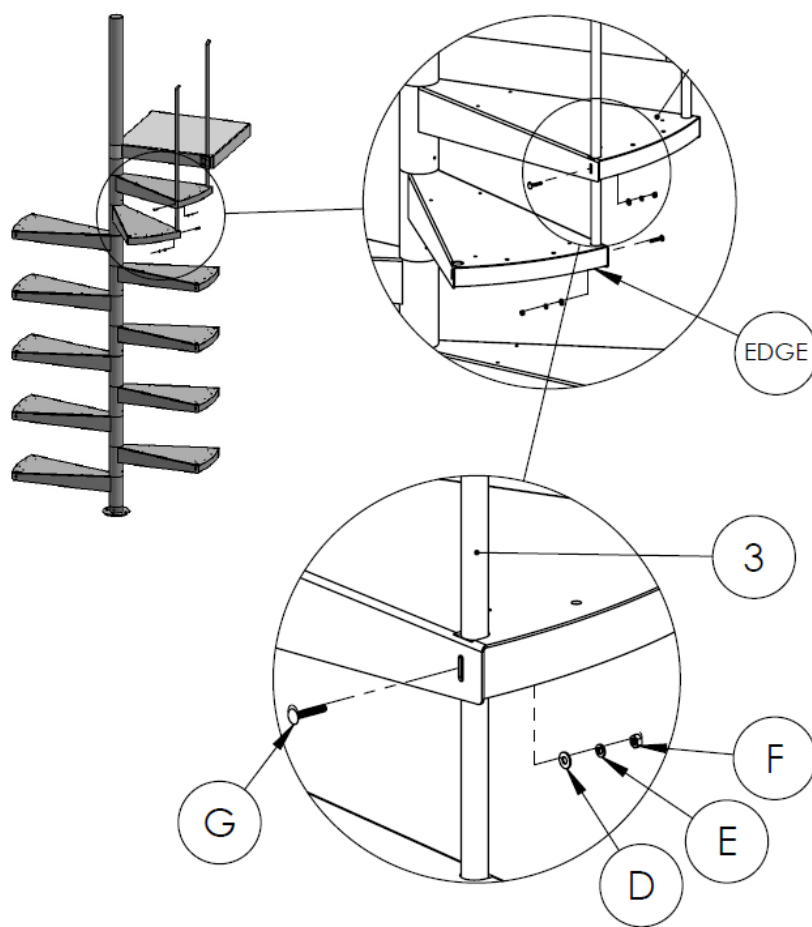

Bottom Baluster Installation

NOTE: The main baluster connecting the bottom tread to the floor must be cut.

1. Cut approximately 1 ½" off the bottom of the last main baluster.
2. Place the bottom baluster bracket on the ground below the first tread. Guide the baluster through the hole in the first tread and into the hole of the bottom baluster bracket.
3. Adjust the height of the lower tread to be one riser height below the tread above. Fasten the baluster with carriage bolt (G), nut (F), washer (D) and lock washer (E).
4. Check that the tread is level and the baluster is plumb. Tighten the 5/16" set screws in the tread hub to lock the tread to the center column.
5. Ensure that the baluster remained plumb, then fasten the bottom baluster bracket to the floor using wood screws (U). Masonry fasteners (not supplied) will need to be used if installing into concrete.

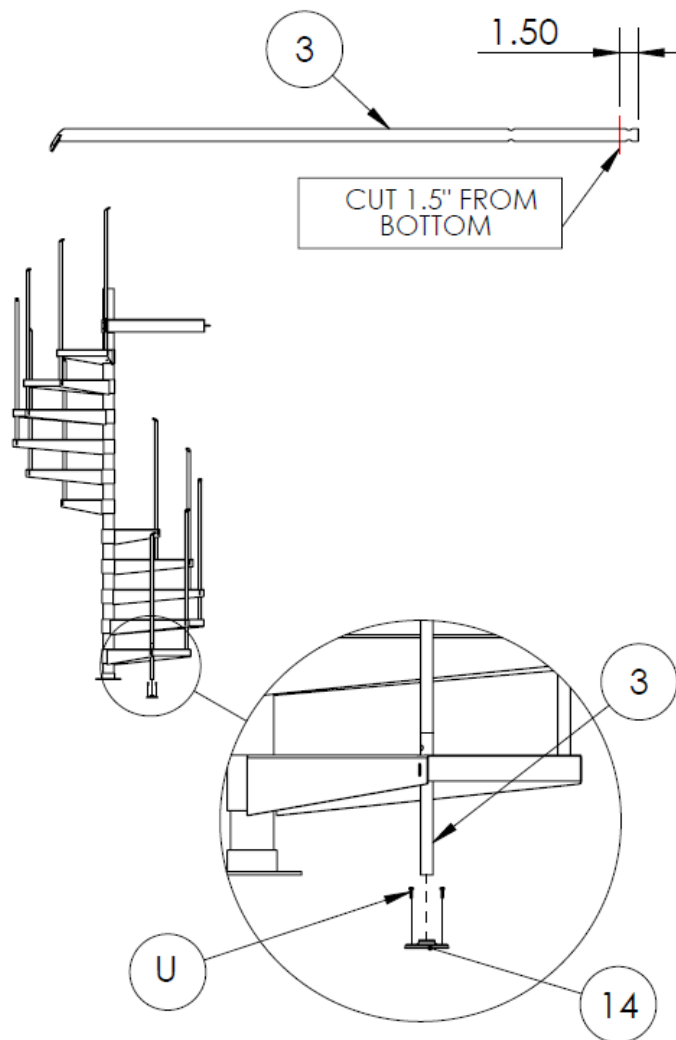

Hardware


(D) (E) (F) (G)

(U)

Parts

(3) (14)

Tools




Aluminum Handrail Forming

1. The handrail is shipped in a coil that is typically between 36" and 48" in diameter. The first step to fitting the handrail is increasing this diameter to the proper coil diameter listed below.

Stair Diameter	3'-6"	5'-0"
Coil Diameter	60"	75"

NOTE: The coil diameter should be larger than the stair diameter.

2. On a soft surface such as carpet, position the coil as depicted below. The cut end (1) should be approximately 4"-6" off the ground.
3. Insert a lever (2) into the cut end. A wooden handle (such as a broom handle) makes a suitable lever.
4. Hold the coil in place on the side opposite the cut end. Push the lever down until the coil bends slightly. It may be necessary to brace the coil where it contacts the ground to prevent it from slipping during this process.

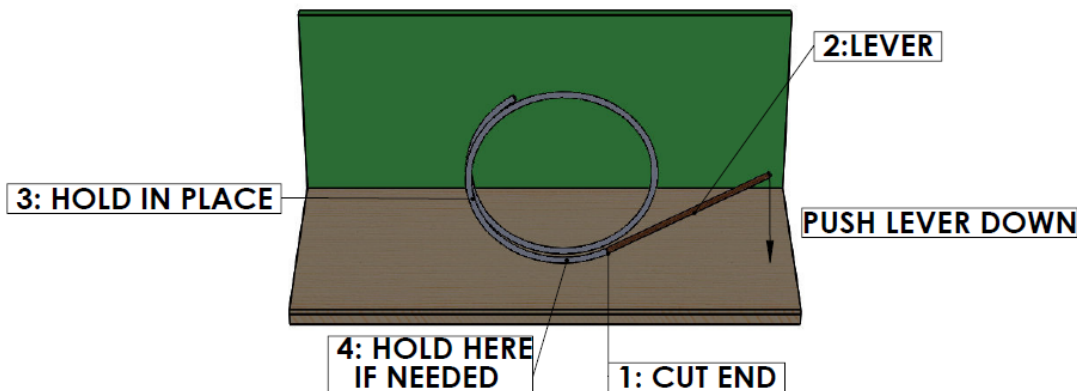

NOTE: This example depicts a right hand up handrail. The lever would be on the left side of a left hand up handrail.

IMPORTANT – The handrail is best formed with a series of many small adjustments. To avoid kinks and/or warped sections, do not sharply bend the handrail.




5. Rotate the handrail counterclockwise (clockwise for left hand up) approximately 20 degrees.
6. Hold the coil in place on the side opposite the cut end. Push the lever down until the coil bends slightly. It may be necessary to brace the coil where it contacts the ground to prevent it from slipping while forming.

Hardware


Parts

⑪

Tools

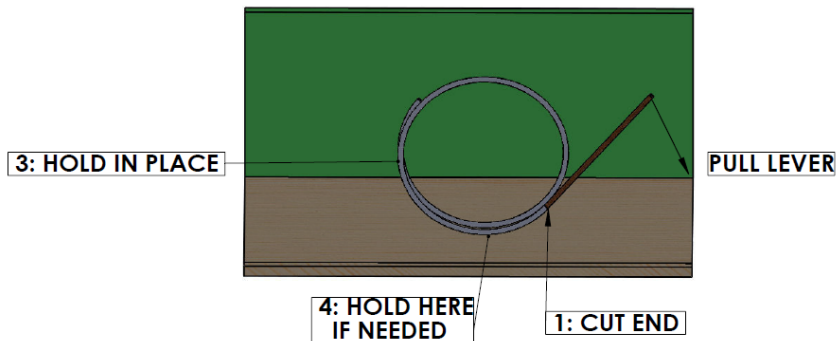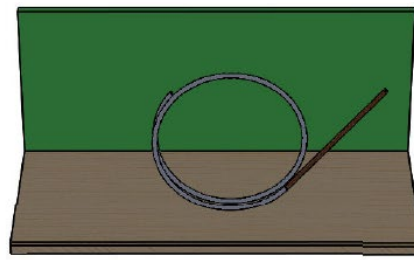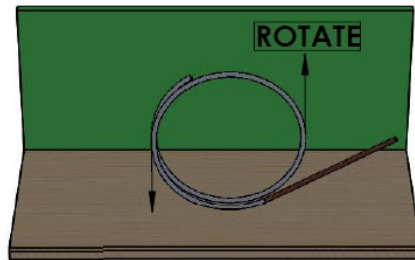

7. Repeat steps 5 and 6 until the cut end is vertical. It should now be long enough to form by hand.
8. Hold the coil in place and pull the unsecured side outward and away from the center of the coil until the coil bends slightly. It may be necessary to brace the coil where it contacts the ground to prevent it from slipping while forming.

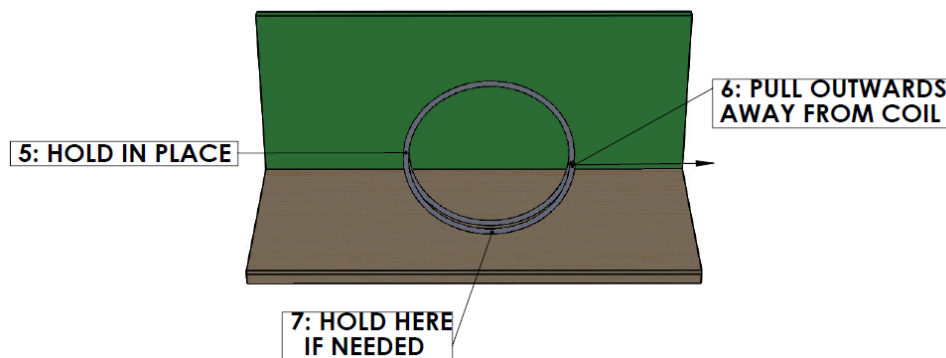


9. Continue rotating the coil and forming until the whole coil has been worked through. Measure the coil diameter to determine if more adjustment is needed. If so, repeat the forming process from the beginning.

IMPORTANT: Do not try to bend the handrail into shape on the first pass through the coil. For best results, make small adjustments and repeat the process as needed.


Checking the Handrail Curvature

10. Lay the handrail down and find the cut end that contacts the ground. Use the method below to determine the orientation of the handrail.

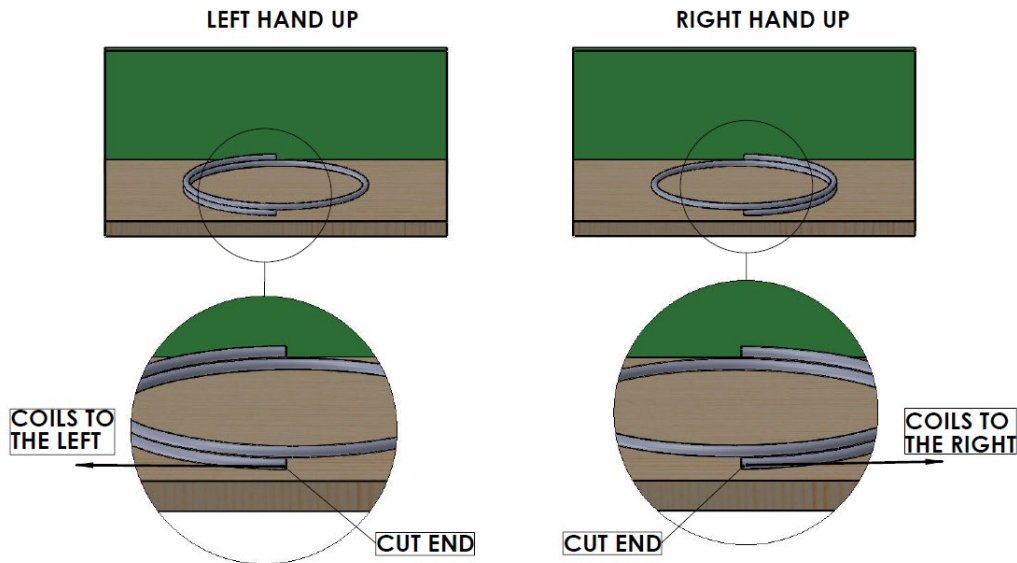

NOTE: If the handrail orientation matches the orientation of the stairs being installed, skip to the next step.

11. Stand the handrail up. Push a cut end towards the center of the coil enough to clear the adjacent rail. Pull this cut end through the coil to the other side. The other cut end must be pulled away from the center of the coil and pushed over the adjacent rail.

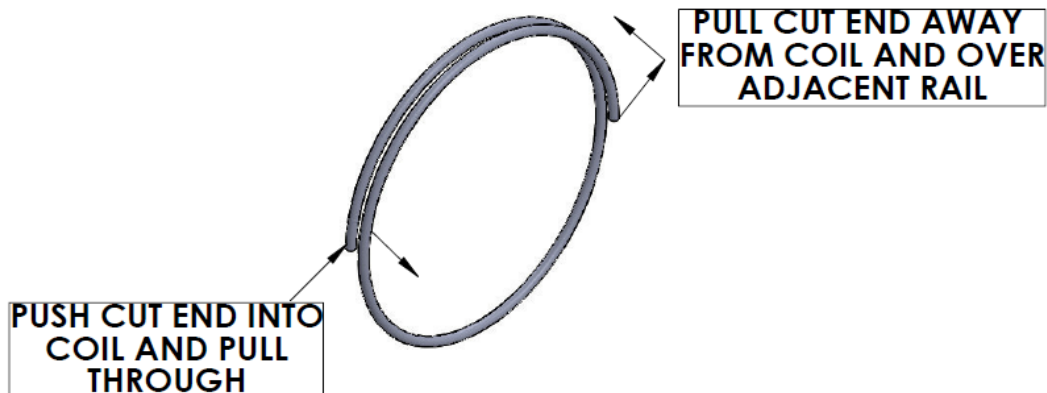

Hardware

Parts

⑪



Tools

Pulling the Handrail into a Spiral

1. Determine the end to end length needed based on the diameter of the stair being installed.

Stair Diameter	3'-6"	5'-0"
End to End Length	14'	11'

2. With the help of another person, pull the handrail apart to the desired end to end length. Stop periodically to inspect the handrail for any kinks that may be forming.

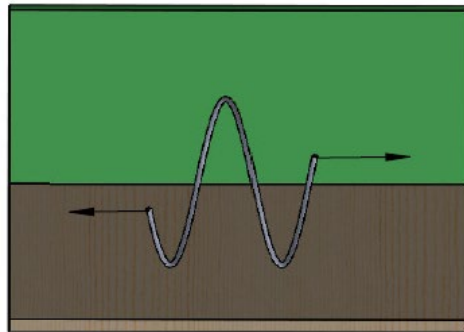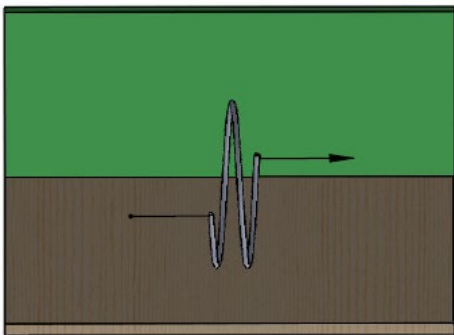

Hardware

Parts

⑪

Tools

Aluminum Handrail Installation

1. Once the Handrail has been shaped, dry fit the rail to the baluster tips.


NOTE: The handrail may be slightly kinked on both ends. This is normal and the handrail should be positioned so that these ends can be cut off after installation.

2. Working together with another person, start at the top of the stair and install each screw (R) through the hole in the tip of each main baluster. Push or pull the handrail as needed to match it up with the baluster tip.

NOTE: To assist in installation, it may be beneficial to use zip ties to hold the handrail onto the baluster tips during the installation process.

NOTE: If the handrail does not sit flush on the baluster tips, the baluster tips can be bent up or down as needed with an adjustable wrench to better match the angle of the handrail. Place a rag between the wrench and the baluster tip to prevent damage to the finish of the baluster tip.

3. Once the handrail has been attached to all of the main balusters, cut the railing 3" above the top baluster and 3" below the bottom baluster. If your local building code requires a longer length, cut the handrail to meet the code.
4. Use the supplied two-part epoxy to bond the endcaps (13) to the handrail.

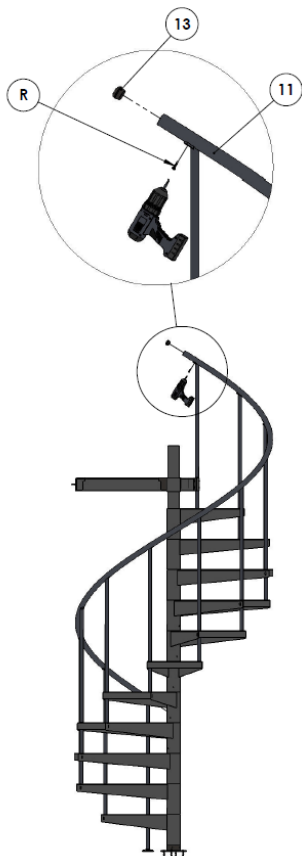

Hardware

(R)

Parts

(11) (13)

Tools




Center Baluster Installation

1. Measure each center baluster (4) from tip (at the handrail) to the top of the corresponding tread.

NOTE: Do not cut all the balusters the same length. Measure each baluster position individually.

2. Using a saw, cut each baluster to the correct length.

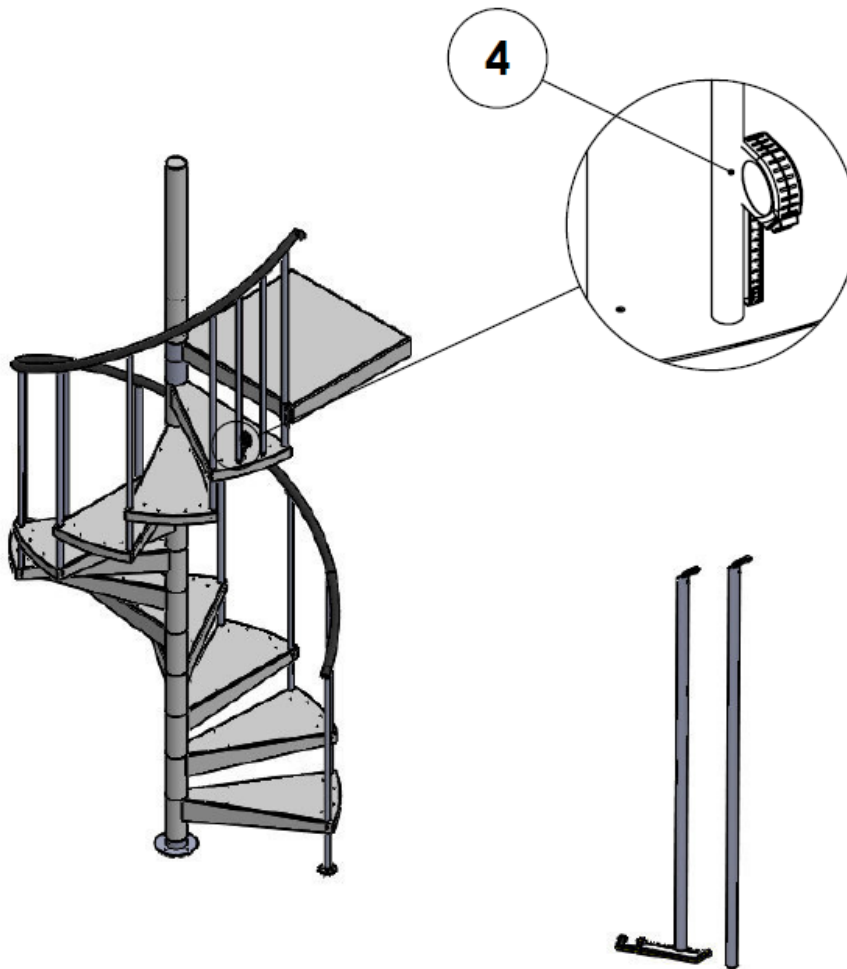

Hardware


Parts

④


Tools



3. Insert bolt (S) through the tread and into hex nut (F). Do not fully tighten the hex nut.
4. Thread a tube connector (T) onto the exposed threads of the bolt until it is seated against the hex nut. Make sure the flanges on the tube connector are facing down towards the tread surface. Unscrew the tube connector one revolution to create a gap between the nut and the tube connector.

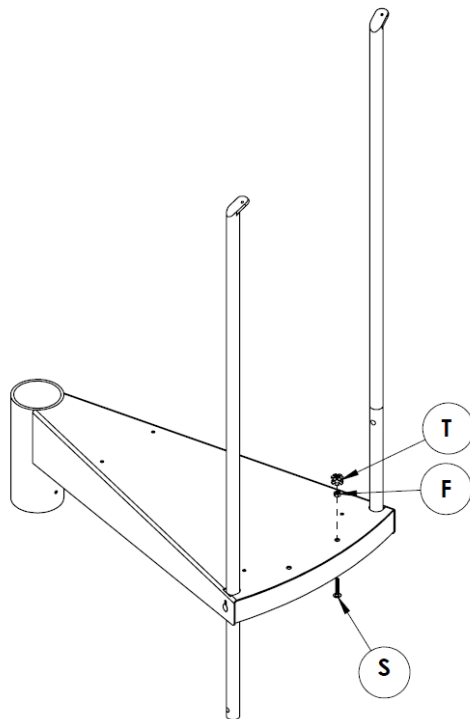


5. Ensure that the baluster tip is in line with the handrail, then slide the center baluster onto the tube connector.
6. Install screw (R) through the hole in the tip of each center baluster.
7. Tighten the screw that was installed in step 3. This will pull the baluster against the tread and complete the connection.

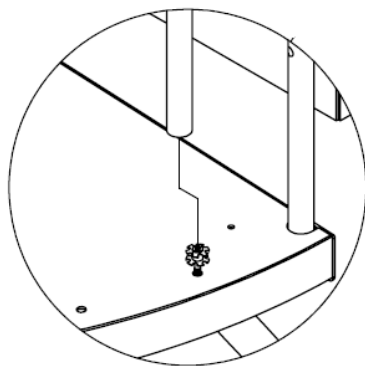

8. Repeat steps 1-7 for each center baluster.

Platform Rail Installation

1. Place the platform rail onto the platform in the correct location. The platform rail will be approximately $\frac{1}{4}$ " away from the column and $\frac{1}{4}$ " away from the end of the platform.
2. Using the holes on the bottom of the platform rail as a template, mark the location of the holes on the top and side surface of the platform.
3. Drill a $\frac{1}{4}$ " diameter hole in each location.
4. Using bolt (G), nut (F), washer (D) and split washer (E), secure the platform rail to the side of the platform.
5. Using bolt (H), nut (F), washer (D) and split washer (E), secure the platform rail to the top of the platform.

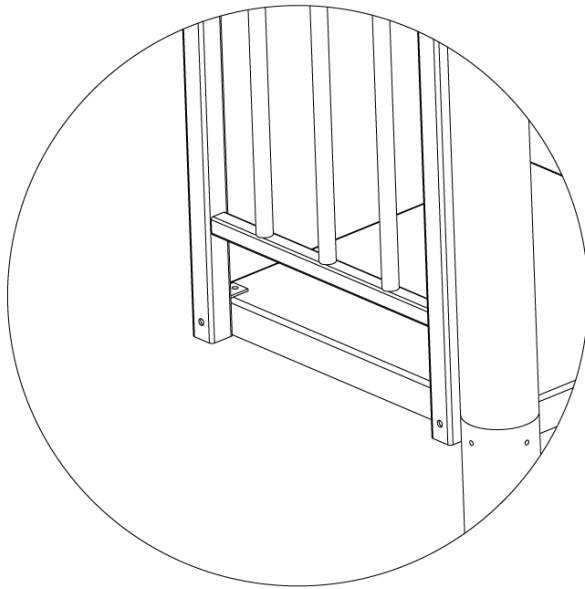

6. If your stair has an extra platform rail, follow steps 1-5 to install the extra platform.

NOTE: The platform rail will be approximately 2" shorter than the extra platform rail. Be sure to install the platform rail first and then the extra platform rail.

WARNING

The platform rail(s) must be installed on the platform of the stair. Failure to install the platform rail(s) could result in serious injury or death.

Hardware

(D) (E) (F) (G)

(H)

Parts

(12) (13)

Tools



INSTALLATION MANUAL

WOOD PLATFORM COVERS AND WOOD TREAD COVERS (IF APPLICABLE)



MP-6

R0

CALIFORNIA PROPOSITION 65 RAW WOOD PRODUCT EXPOSURE



WARNING: Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. For more information go to www.P65Warnings.ca.gov/wood

CALIFORNIA PROPOSITION 65



WARNING: This product can expose you to chemicals including formaldehyde, ethylbenzene, titanium dioxide, cumene, carbon black, silica and wood dust, which are known to the State of California to cause cancer, and toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

IMPORTANT MESSAGE

On behalf of everyone at Salter Spiral Stair, we would like to thank you for your purchase of one of our products. This product is designed and manufactured in the USA. This stair comes with an Installation Manual. It is important that you read and fully understand this manual prior to installation. Following the steps exactly as specified in the manual will ease installation and reduce the amount of time necessary to complete the process. Keep this manual even after the installation process has been completed. Understand how to use tools that may be required during the installation process. Observe all safety warnings called out in this manual. Make sure those who may install this product for you understand this manual as well as you do.





Salter Spiral Stair
105 GP Clement Drive
Collegeville, PA 19426

Table of Contents

Preparing for Installation	4
Parts & Hardware	5
Wood Handling and Finishing	6
Wood Tread Cover Installation	7
Wood Platform Cover Installation	8

NOTICE !!!

Unauthorized modifications may present extreme safety hazards and could also result in injury or product damage. Salter Spiral Stair strongly warns against, rejects and disclaims any modifications, add-on accessories or product alterations that are not designed, developed, tested and approved by Salter Spiral Stair's Engineering Department. Any Salter Spiral Stair product that is altered, modified or changed in any manner not specifically authorized after original manufacture – including the addition of “aftermarket” accessories or component parts not specifically approved by Salter Spiral Stair – will result in the Salter Spiral Stair warranty being voided. Any and all liability for personal injury and/or property damage caused by any unauthorized modifications, add-on accessories or products not approved by Salter Spiral Stair will be considered the responsibility of the individual(s) or company designing and/or making such changes. Salter Spiral Stair will vigorously pursue full indemnification and costs from any party responsible for such unauthorized post-manufacture modifications and/or accessories should personal injury and/or property damage result.

 <p>This symbol means: ATTENTION! BECOME ALERT!</p> <p>Your safety and the safety of others is involved.</p> <p>Signal word definitions: The signal words below are used to identify levels of hazard seriousness. For your safety and the safety of others, read and follow the information given with these signal words and/or the symbol shown above.</p>	 <p>WARNING indicates a potentially hazardous situation which, if not avoided, COULD result in death or serious injury.</p>
	 <p>CAUTION indicates a potentially hazardous situation which, if not avoided, MAY result in minor or moderate injury. It may also be used to alert against unsafe practices or property damage.</p>
	 <p>DANGER indicates an imminently hazardous situation which, if not avoided, WILL result in death or serious injury.</p>

Preparing For Installation

Read the Installation Manual

- If anyone involved in the installation process cannot read English, it is the owner's responsibility to explain the contents of this manual to them.
- If any portion of this manual is unclear, contact the Salter Spiral Stair Customer Service Department for clarification.
- It is the owner's responsibility to be familiar with the use of any tools that may be necessary to complete the installation of this product. Read the manual for these specific tools.
- Do not install or allow anyone to install this product if there are any questions about the installation process.
- Never attempt to install this product if any of the components are damaged or have any unauthorized modifications.
- All persons should be trained. The owner is responsible for training the users.
- Wear the appropriate personal protective equipment during installation.
- Wear hearing protection.
- Wear safety glasses.
- Wear a dust mask to avoid breathing dust.
- Never allow children, unskilled or improperly trained people to participate in the installation process.
- Keep the Installation Manual legible and intact.
- Do not attempt to install this product while under the influence of drugs or alcohol.
- The owner/user can prevent and is responsible for accidents or injuries occurring to themselves, other people or property.

Site Preparation

- Check the area where the product is to be installed.
- Be sure the area is clear of pets and people, especially young children. Stop the installation process if any enter the area.
- Installation should be done in daylight or in good artificial light.
- Only use components approved by the manufacturer.



Installation Preparation


- Do not tamper with any component.
- Use extra care when unloading or moving any component. Some components may be heavy and require multiple people to move them safely.
- Keep all fasteners such as nuts and bolts well secured.
- Verify that all components are in good condition and are not damaged in any way.
- Do not start the assembly process until you read the Installation Manual.
- Do not use the stair until the assembly process is complete.

Suspending the Installation Procession

- If it is necessary to suspend the installation process, it is the owner's responsibility to mark off the area to limit access until the installation is complete.
- Do not allow anyone to use the stair until the assembly process is complete.

Parts & Hardware

	
① Tread Cover	② Platform Cover

Item		Description
Ⓐ		#10-12-3/4 Wood Screw



READ BEFORE STARTING INSTALLATION

WOOD HANDLING

UNFINISHED TREADS AND HANDRAILS ON THE JOB SITE WILL ABSORB MOISTURE FROM THE AIR. THESE MUST BE SEALED WITHIN 1 WEEK TO AVOID ADVERSE EFFECTS ON THE WOOD.

NEARBY PLASTERING, TILE WORK, CEMENT OR BRICKWORK INTRODUCE ENOUGH WATER IN THE IMMEDIATE ENVIRONMENT FOR THE WOOD TO BE AFFECTED.


IF NEEDED, STORE THE WOOD PROVIDED IN A COOL, DRY AND STRUCTURALLY STABLE LOCATION.

WOOD FINISHING


- A. SAND ALL WOOD SURFACES BEFORE APPLYING ANY STAIN OR POLYURETHANE. NEARLY ALL PROBLEMS WITH FINISHING OCCUR DUE TO IMPROPER SANDING PRIOR TO STAIN OR POLYURETHANE APPLICATION. TREADS MAY RUB TOGETHER, OR AGAINST OTHER SURFACES DURING HANDLING AND TRANSPORTATION. THIS MAY CREATE "SHINY SPOTS" WHICH PREVENT AN EVEN FINISH. TAKE PRECAUTIONS WHEN TRANSPORTING TREADS.
- B. SAND ALL WOOD SURFACES WITH 100 TO 220 GRIT RATING.
- C. APPLY A STAIN IF ANY COLOR OTHER THAN THE NATURAL FINISH IS DESIRED.
- D. THREE COATS OF SEALER MUST BE APPLIED TO ALL WOOD SURFACES. INADEQUATE FINISHING OF ALL SIX SIDES OF A TREAD (WHICH INCLUDES THE BOTTOM) WILL ALLOW MOISTURE TO BE ABSORBED.
- E. CHECK WITH YOUR PAINT SPECIALTY DEALER FOR FURTHER INSTRUCTIONS IF NEEDED.

Wood Tread Cover Installation

17. The treads are not pre-drilled to accept the tread covers (1).
18. Drill four 1/4" holes in the steel tread top in the approximate location shown below. Do not drill the holes too close to the edge of the tread top. If the holes are too close to the edge of the tread, the wood tread cover could split when installing the screws.

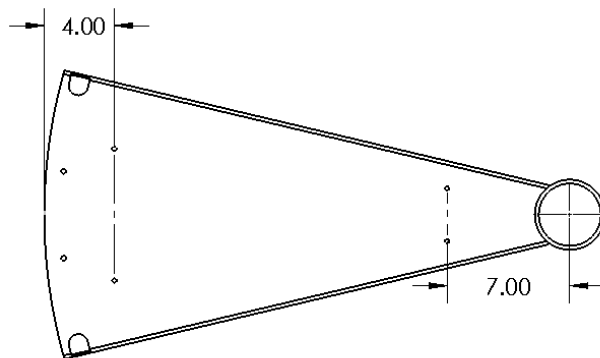

19. Locate the wood tread cover on top of the tread and center it so the reveal is the same on the front and back of the tread.
20. Install the pan head wood screw (A) through the holes drilled in step 2 and into the wood tread cover.
21. Repeat this step for each tread until all the tread covers have been installed.

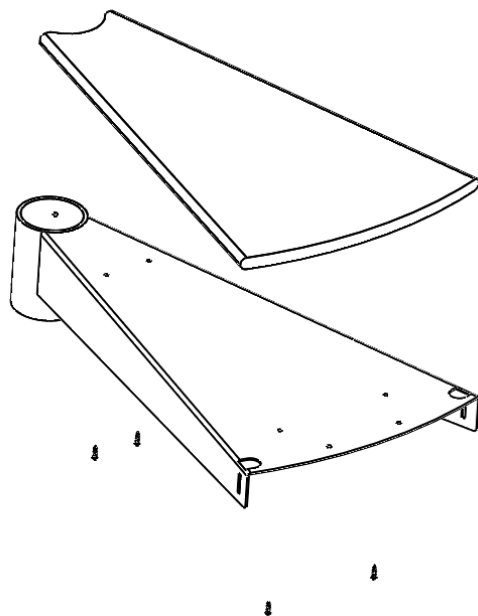

Hardware

(A)

Parts


(1)

Tools




Wood Platform Cover Installation

1. The platform is not pre-drilled to accept the platform cover (2).
2. Drill four ¼" holes in the steel platform top in the approximate location shown below. Do not drill the holes too close to the edge of the tread top. If the holes are too close to the edge of the platform, the wood platform cover could split when installing the screws.

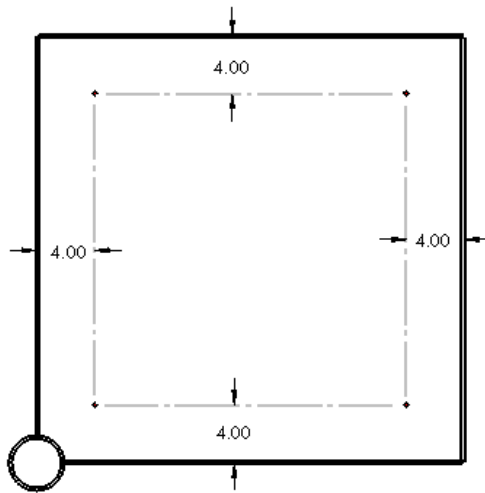

3. Locate the wood platform cover on top of the platform.
4. Install the pan head wood screws (A) through the holes drilled in step 2 and into the wood platform cover.

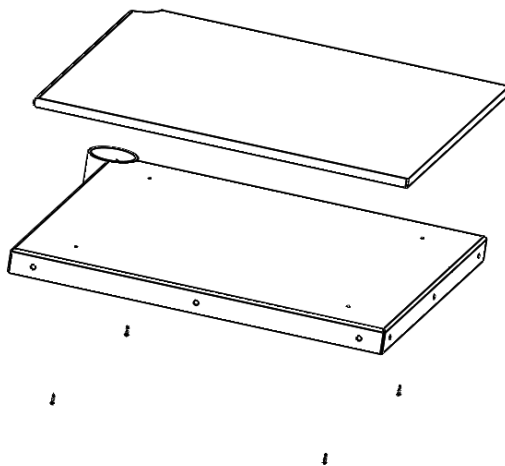

Hardware

(A)

Parts

(2)

Tools



